

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

REC'D 04 SEP 2003

WIPO

INT

10 / 525978
PCT/ SE 03 / 01318

28 FEB 2005

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Sandvik AB, Sandviken SE
Applicant (s)

(21) Patentansökningsnummer 0202533-6
Patent application number

(86) Ingivningsdatum 2002-08-28
Date of filing

Stockholm, 2003-08-28

För Patent- och registreringsverket
For the Patent- and Registration Office



Lisa Junegren

Avgift
Fee

BEST AVAILABLE COPY

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

AWAPATENT AB

Kontor/Handläggare

Växjö/Erik Simonsson/ESN

SANDVIK AB

Ansökningsnr

Vår referens

SE-2023094

1

A WEAR PART FOR A CRUSHER

Technical Field of the Invention

The present invention relates to a distributor plate adapted to be releasably mounted on a horizontal lower disc of a rotor of a vertical shaft impact crusher, said rotor having an opening for the intake of material to be crushed and at least one outflow opening for material leaving the rotor.

10 Background Art

Vertical shaft impact crushers (VSI-crushers) are used in many applications for crushing hard material like rocks, ore etc. US 3,154,259 describes a VSI-crusher comprising a housing and a horizontal rotor located inside the housing. Material that is to be crushed is fed into the rotor via an opening in the top thereof. With the aid of centrifugal force the rotating rotor ejects the material against the wall of the housing. On impact with the wall the material is crushed to a desired size. The housing wall could be provided with anvils or have a bed of retained material against which the accelerated material is crushed.

The rotor of a VSI-crusher usually has a horizontal upper disc and a horizontal lower disc. The upper and lower discs are connected with a vertical rotor wall. The upper disc has an aperture for feeding material into the rotor. The material lands on the lower disc and is then thrown out of the rotor via openings in the rotor wall.

The material exerts an impact force and wear on the lower disc. To ensure a long life of the lower disc it is usually provided with a distributor plate. The distributor plate, which is located at the centre of the

lower disc, is made from a material that is resistant to impact and wear.

In US 3,767,127 to Wood a deflection disc assembly is described. The deflection disc has an outer ring and a
5 core member. A central stud passing through the core member and threadedly engaged to the rotor shaft holds the deflection disc in position in the rotor.

US 4,690,341 to Hise describes a flat centre wear plate which is fixed to the rotor shaft by a bolt.

10 WO 01/30501 describes a distributor comprising a first part having an inclined surface and a second part with a flat surface. A bolt holds the first and second parts fixed to a rotor shaft.

The distributor plates described above do not have a
15 very long life and cause a rather long down time when they need to be replaced. To make it possible for a person working with the rotor to replace the distributor plate it is often necessary to dismantle the top of the rotor.

20

Summary of the Invention

It is an object of the present invention to provide a distributor plate which has a longer life and which
25 decreases the down time required for maintenance of the rotor.

This object is achieved with a distributor plate according to the preamble and characterised in that the distributor plate has at least one straight side edge as
seen from above.

30 An advantage with this distributor plate is that its life is greatly increased. The straight side edge decreases the wear, particularly at the periphery of the distributor plate. A possible explanation is that much of the wear at the periphery of the distributor plate may be
35 caused by dust loaded air streams circulating inside the rotor. Those air streams may be hindered by the straight side edge thus reducing the wear.

Preferably the distributor plate is a polygon. A polygon has several straight side edges and would thus be able to efficiently hinder any dust loaded air streams. Still more preferably said polygon is an equilateral polygon, the number of sides of the polygon being chosen such that the number of sides is 1, 2 or 3 times the number of outflow openings of the rotor to which the distributor plate is to be mounted. An equilateral polygon makes it easier to balance the rotor. The distributor plate should have at least one side edge corresponding to each outflow opening of the rotor. If the number of sides of the distributor plate is 2 or 3 times the number of outflow openings it is possible to turn the distributor plate after some time in operation such that the sides being adjacent to the outflow openings is changed. Thus the life of the distributor plate is prolonged. Preferably the number of sides is 2 times the number of outflow openings of the rotor. This design has proven to give both a long life, possibly due to the fact that such a number of sides are especially efficient in hindering the rotating air streams inside the rotor, and the possibility to turn the distributor plate after some time of operation to further increase its life.

Preferably at least one straight side edge of the distributor plate is adapted to be parallel to an outflow direction of material leaving the rotor. This design has proven to give a long life. It is also easy to make the distributor plate fit with a horizontal wear plate extending from a position close to the centre of the rotor and towards the outflow opening.

According to a preferred embodiment the distributor plate at the centre of its lower face has a recess adapted to make the distributor plate horizontally turnable around a vertical shaft mounted on the lower disc, such that the position of the distributor plate in relation to the lower disc may be adjusted before

mounting the distributor plate. The recess makes it easy to centre the distributor plate on the rotor. After centring the distributor plate it may be turned around the shaft until the correct position of the edge/-s is obtained, the distributor plate still being safely centred. It also becomes easy to turn the distributor plate to some degree after it has become worn. This makes it possible to quickly turn the distributor plate to a new position without having to dismount the rotor. Thus maintenance stops become quick and efficient. Still more preferably the recess extends only through a part of the thickness of the distributor plate, the upper face of the distributor plate thus being unaffected by said recess. An advantage with this design is that the upper surface of the distributor plate obtains a much better impact and wear resistance since it is unbroken. The central part of the distributor plate is exposed both to heavy impact wear and possibly also to wear caused by dust loaded air streams circulating inside the rotor. The risk of rocks breaking a central bolt and the risk of an excessive wear of a central bolt or of a cap protecting a central bolt is thus avoided with the design of the present invention. Also it becomes easier to manufacture the distributor plate with the unbroken upper surface, in particular if the upper surface is to be provided with a layer of extra resistant material.

Preferably the upper face of the distributor plate comprises an unbroken layer of a hard metal, such as tungsten carbide. Such a layer of hard metal will substantially prolong the life of the distributor plate and thus decrease maintenance costs.

According to a preferred embodiment the distributor plate comprises mounting means located at a vertical side edge of the distributor plate and adapted for the mounting of a vertical support fixing the distributor plate to the lower disc of the rotor. An advantage with such mounting means is that they do not interact with the

upper surface of the distributor plate. Another advantage is that the distributor plate will provide some protection for the mounting means located below the actual material flow. The mounting means may also be fitted and removed without having to lift the entire distributor plate.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereafter.

Brief Description of the Drawings

The invention will hereafter be described in more detail and with reference to the appended drawings.

Fig 1 is three-dimensional section view and shows a rotor for a VSI-crusher

Fig 2 is a three-dimensional view and shows the rotor of fig 1 with the upper disc removed.

Fig 3 shows the view of fig 2 as seen from above in a two dimensional perspective.

Fig 4 is an enlargement of the central portion of fig 3 and shows a distributor plate.

Fig 5 is a sectional view along the line V-V of fig 4.

Fig 6 is a three-dimensional view of the distributor plate.

Fig 7 is a three-dimensional view as seen along the arrow VII of fig 4.

Fig 8 is a three-dimensional view of a distributor plate according to a second embodiment of the invention.

Fig 9 is a three-dimensional view and shows an alternative way of releasably fixing the distributor plate.

Fig 10 is an enlargement of the area X shown in fig 9.

Fig 11 shows the distributor plate before being secured to the mounting plate.

Fig 12 shows a locking member for securing the distributor plate to the mounting plate.

Fig 13 is a three-dimensional view of a distributor plate according to a third embodiment of the invention.

5

Detailed Description of Preferred Embodiments of the Invention

Fig 1 shows a rotor 1 for use in a VSI-crusher. The rotor 1 has a roof in the form of an upper disc 2 having a top wear plate 3 and a floor in the form of a lower disc 4. The lower disc 4 has a hub 6, which is welded to the disc 4. The hub 6 is to be connected to a shaft (not shown) for rotating the rotor 1 inside the housing of a VSI-crusher.

15 The upper disc 2 has a central opening 8 through which material to be crushed can be fed into the rotor 1. The upper disc 2 is protected from wear by upper wear plates 10 and 12. The upper disc 2 is protected from rocks impacting the rotor 1 from above by the top wear plate 3. As is better shown in fig 2 the lower disc 4 is protected from wear by three lower wear plates 14, 16 and 18.

25 The upper and lower discs 2, 4 are separated by and held together by a vertical rotor wall which is separated into three wall segments 20, 22 and 24. The gaps between the wall segments 20, 22, 24 define outflow openings 26, 28, 30 through which material may be ejected against a housing wall.

30 At each outflow opening 26, 28, 30 the respective wall segment 20, 22, 24 is protected from wear by three wear tips 32, 34, 36 located at the trailing edge of the respective wall segment 20, 22, 24.

35 A distributor plate 38 is fastened to the centre of the lower disc 4. The distributor plate 38 distributes the material that is fed via the opening 8 in the upper disc 2 and protects the lower disc 4 from wear and impact damages caused by the material fed via the opening 8.

During operation of the rotor 1 a bed 40 of material is built up inside the rotor 1 against each of the three wall segments 20, 22, 24. In fig 3 only the bed 40 located adjacent to the wall segment 20 is shown. The bed 40, which consists of material that has been fed to the rotor 1 and then has been trapped inside it, extends from a rear support plate 42 to the wear tips 32, 34, 36. The bed 40 protects the wall segment 20 and the wear tips 32, 34, 36 from wear and provides a proper direction to the ejected material. The dashed arrow A describes a typical passage of a piece of rock fed to the rotor 1 via the central opening 8 and ejected via the outflow opening 26. The arrow R indicates the rotational direction of the rotor 1 during operation of the VSI-crusher.

Each wall segment 20, 22, 24 is provided with a cavity wear plate 44, 46, 48, each consisting of three cavity wear plate portions. The cavity wear plates 44, 46, 48 protects the rotor 1 and in particular the wear tips 32, 34, 36 from material rebounding from the housing wall and from ejected material and airborne fine dust spinning around the rotor 1.

In fig 4 the hexagonal shape of the distributor plate 38 is shown in greater detail. The distributor plate 38 has six equilateral, vertical side edges 50, 52, 54, 56, 58, 60. The side edge 50 is substantially parallel to the outflow direction B of the material leaving the rotor 1 via the outflow opening 26. The side edge 50 is also parallel and adjacent with the face 62 of the wear plate 14. In a similar way the side edge 58 is adjacent to the face 64 of the wear plate 16 and the side edge 54 is adjacent to the face 66 of the wear plate 18. The distributor plate 38 has a central flat area 68 from which a sloped surface 70 of the distributor plate 38 extends towards the side edges 50, 52, 54, 56, 58 and 60.

The distributor plate 38 is removably fixed to the lower disc 4 with the help of three vertical supports 72, 74, 76 fitted to the side edges 52, 56, 60 that are not

adjacent to a face of a wear plate. Thus the vertical supports 72, 74, 76 are located at some distance from the typical rock passage indicated with the arrow A.

As is shown in figure 5 the distributor plate 38 rests on a mounting plate 78. The mounting plate 78 has the same hexagonal shape as the distributor plate 38 as seen from above. The mounting plate 78 is bolted to the hub 6 and thus to the lower disc 4. A vertically mounted central bolt 80 extending through the mounting plate 78 is bolted at the centre of the hub 6. The distributor plate 38 has a central cylindrical recess 82 at its lower face 84. The diameter and depth of the recess 82 is adapted to house the circular top of the bolt 80 such that the bolt 80 centres the distributor plate 38 on the lower disc 4. The lower face 84 of the distributor plate 38 may slide on the upper surface of the mounting plate 78 when a locking member 206 according to an alternative embodiment of a vertical support described below has been removed. The lower surface 84 of the distributor plate 38 is located at a higher level than the upper surfaces of the wear plates 14, 16, 18. Thus it is possible to turn the distributor plate 38 on the mounting plate 78 without removing the wear plates 14, 16, 18.

The flat area 68 and the sloped surface 70 together form an unbroken upper surface 86 of the distributor plate 38 as indicated in fig 6. The distributor plate 38 shown in fig 6 is made entirely from white iron. Each vertical side edge 50, 52, 54, 56, 58, 60 has a mounting means in the form of a hole 88 as shown in fig 6. The hole 88 may be provided with an inner thread to receive a bolt 90 forming part of the support 72, 74 and 76 respectively, as seen in fig 7. As is shown in fig 7 the supports 72, 74, 76 are fitted in slots in the lower disc 4 and bolted to the distributor plate 38 with the help of the bolts 90 thus holding the distributor plate 38 in place.

The mounting of the distributor plate 38 is performed by lowering it such that the recess 82 engages the top of the bolt 80. The distributor plate 38 is then turned in the horizontal plane until the side edges 50, 54 and 58 have the proper position in relation to the wear plates 14, 16, 18. The supports 72, 74, 76 are mounted to the distributor plate 38 such that it becomes fixed to the lower disc 4.

After some time of operation of the rotor 1 the distributor plate 38 has been subjected to some wear. The wear pattern often has a certain relationship with the outflow openings, such that the maximum wear often occurs at the side edges 50, 54, 58 being adjacent to a horizontal wear plate. The supports 72, 74, 76 are dismantled. The distributor plate 38 is now turned horizontally, thus sliding on the upper surface of the mounting plate 78, until the side edge 52 is adjacent to the face 62 of the wear plate 14, the side edge 56 being adjacent to the face 66 of the wear plate 18 and so on. The supports 72, 74, 76 are mounted again and the rotor 1 is ready for operation. Thus it is possible to prolong the life of the distributor plate 38 by simply turning it 60° in the horizontal plane after some time of operation. At the turning sequence the distributor plate 38 need not be lifted, since it simple slides on the mounting plate 78. The turning thus becomes very quick and easy to perform.

In fig 8 another embodiment of the invention is shown. The main difference compared to the distributor plate 38 is that this embodiment is a distributor plate 138 in the form of an equilateral triangle. The distributor plate 138 has a central flat area 168 from which a sloped surface 170 extends towards the three vertical side edges 150, 152, 154. Each of the three vertical side edges 150, 152, 154 is adapted to be located adjacent to a face of a wear plate. The

distributor plate 138 is thus adapted for mounting at a rotor having three outflow openings.

In fig 9 to 12 an alternative embodiment of the
5 fixing of the distributor plate 38 is shown. The mounting
plate 78 is provided with a pair of lugs 200, 202 and a
round mounting hole 204 as is better shown in figure 11.
A vertical support in the form of a locking member 206,
shown in figure 12, is provided with an upper pin 208 and
10 a lower pin 210. The upper pin 208 fits into the hole 88,
which need not be threaded, of the distributor plate 38
and the lower pin 210 fits into the mounting hole 204 of
the mounting plate 78. A spring dowel pin 212 is inserted
via holes 214, 216 in the lugs 200, 202 to lock the
15 locking member 206 in its proper position. The locking
member 206 thus fixes the distributor plate 38 to the
mounting plate 78. The locking member 206 is easily
mounted by just inserting its pins 208, 210 into the hole
88 and the mounting hole 204 respectively followed by
20 insertion of the spring dowel pin 212 such that it locks
the locking member 206. The above described embodiment
provides for very quick mounting or turning of the
distributor plate 38. Preferably pairs of lugs 200, 202
25 are located at those sides of the mounting plate 78 that
are located at some distance from a rock passage, such as
the rock passage indicated with the arrow A in fig 3.
Thus the wear on the locking member 206 is minimized. As
indicated in fig 9 and fig 10 the upper part of the
locking member 206 is located below the upper surface 86
30 of the distributor plate 38. Thus the feed material
flowing over the upper surface 86 of the distributor
plate 38 will flow over the locking member 206 without
causing any substantial wear to it.

Fig 13 shows a third embodiment of the invention. A
35 hexagonal distributor plate 338 shown in fig 13 has
vertical side edges 350, 352, 354 and holes 388 that are
similar to the vertical side edges 50, 52, 54 and holes

88 respectively of the distributor plate 38 described above. The upper surface 386 of the distributor plate 338 is flat. The distributor plate 338 comprises a base layer 340 made from a flat sheet of a hard steel. A top layer 342 of a hard metal, such as tungsten carbide, has been coated on the flat upper surface of the base layer 340. The distributor plate 338 having the top layer 342 made of tungsten carbide has very good resistance to wear and impact and will have a very long life. The flat upper surface of the base layer 340 makes the tungsten carbide layer 342 easy to apply to the base layer 340. The fact that the upper surface 386 of the tungsten layer 342 will be flat as well also contributes to making the application of the tungsten layer 342 simple. The distributor plate 338 has a recess (not shown in fig 13) which is similar to the recess 82 of the distributor plate 38. The fact that no bolts or holes extend through the upper surface 386 avoids the formation of any weak spots in the tungsten layer 342 thus further improving its resistance to wear and impact.

It will be appreciated that numerous modifications of the embodiments described above are possible within the scope of the appended claims.

The number of edges and thus the polygonal shape of the distributor plate may be varied to fit the rotor in question. For a rotor with three outflow openings a distributor with triangular or hexagonal shape is preferably used. A nonagonal shape is also possible. For a rotor with four outflow openings a distributor having square or octagonal shape is preferably used. A dodecagonal shape is also possible. A distributor plate having a number of side edges being two times the number of outflow openings is preferable since the distributor may be turned once for prolonged life.

CLAIMS

1. A distributor plate adapted to be releasably
 5 mounted on a horizontal lower disc (4) of a rotor (1) of
 a vertical shaft impact crusher, said rotor (1) having an
 opening (8) for the intake of material to be crushed and
 at least one outflow opening (26) for material leaving
 the rotor (1), c h a r a c t e r i s e d in that the
 10 distributor plate (38; 138; 338) has at least one
 straight side edge (50; 150; 350) as seen from above.

2. A distributor plate according to claim 1, wherein
 the distributor plate (38; 138; 338) is a polygon.

3. A distributor plate according to claim 2, wherein
 15 said polygon is an equilateral polygon, the number of
 sides (50, 52, 54, 56, 58, 60) of the polygon being
 chosen such that the number of sides is 1, 2 or 3 times
 the number of outflow openings (26, 28, 30) of the rotor
 (1) to which the distributor plate (38) is to be mounted.

20 4. A distributor plate according to claim 3, wherein
 the number of sides (50, 52, 54, 56, 58, 60) is 2 times
 the number of outflow openings (26, 28, 30) of the rotor
 (1).

5. A distributor plate according to any one of the
 25 preceding claims, wherein at least one straight side edge
 (50) of the distributor plate (38) is adapted to be
 parallel to an outflow direction (B) of material leaving
 the rotor (1).

6. A distributor plate according to any one of the
 30 preceding claims, wherein the distributor plate (38) at
 the centre of its lower face (84) has a recess (82)
 adapted to make the distributor plate (38) horizontally
 turnable around a vertical shaft (80) mounted on the
 lower disc (4), such that the position of the distributor
 35 plate (38) in relation to the lower disc (4) may be
 adjusted before mounting the distributor plate (38).

7. A distributor plate according to claim 6, wherein the recess (80) extends only through a part of the thickness of the distributor plate (38), the upper face (86) of the distributor plate (38) thus being unaffected by said recess (80):

8. A distributor plate according to any one of the preceding claims, wherein the upper face (386) of the distributor plate (338) comprises an unbroken layer (342) of a hard metal, such as tungsten carbide.

9. A distributor plate according to any one of the preceding claims, wherein the distributor plate comprises mounting means (88) located at a vertical side edge (50) of the distributor plate (38) and adapted for the mounting of a vertical support (72; 206) fixing the distributor plate (38) to the lower disc (4) of the rotor (1).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180

ABSTRACT

A distributor plate (38) is adapted to be releasably
5 mounted on a horizontal lower disc of a rotor of a
vertical shaft impact crusher. The rotor has an opening
for the intake of material to be crushed and at least one
outflow opening for material leaving the rotor. The
distributor plate (38) has at least one straight side
10 edge (50) as seen from above.

15

20

25

30

35

Elected for publication: Fig 6.

1/6

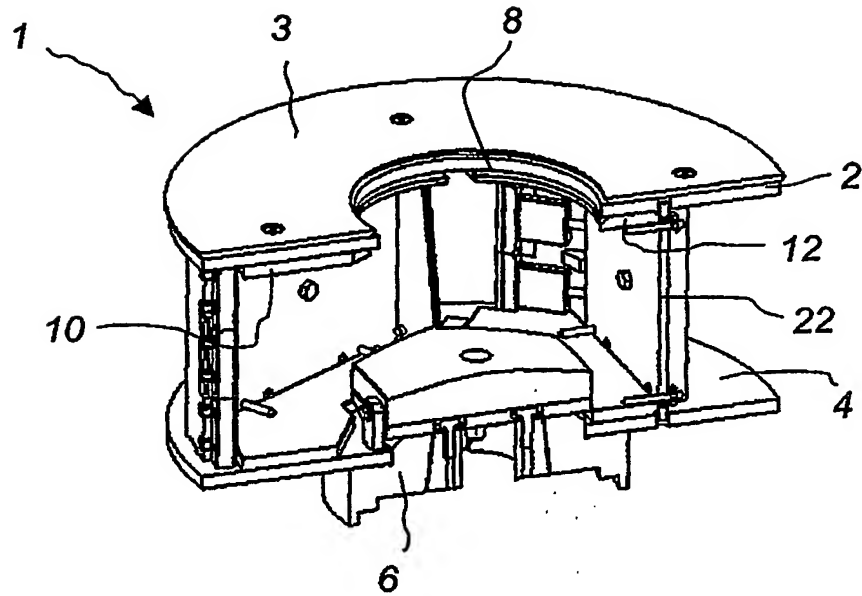


Fig. 1

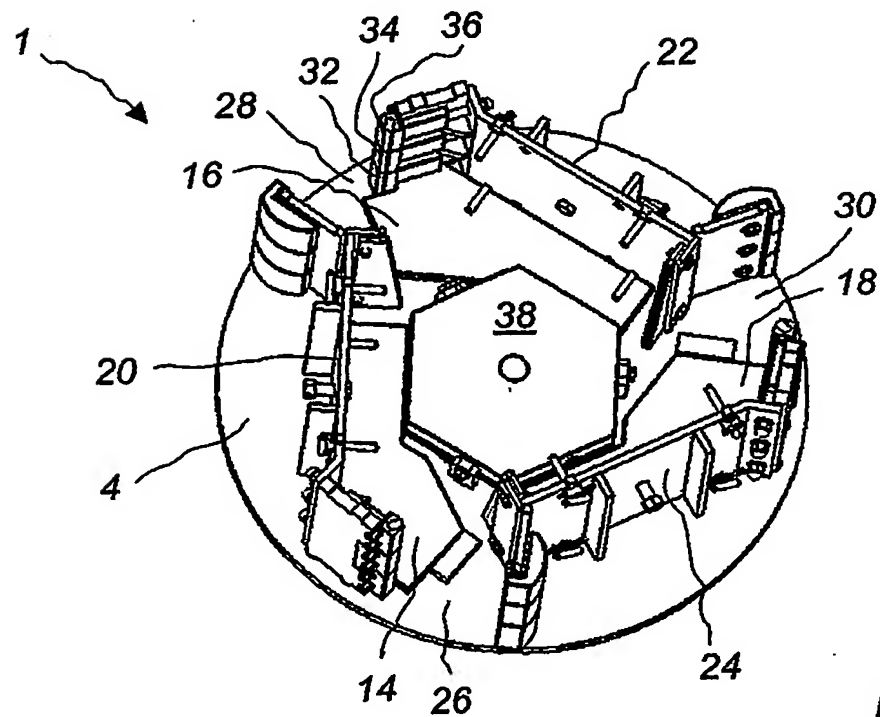


Fig. 2

2/6

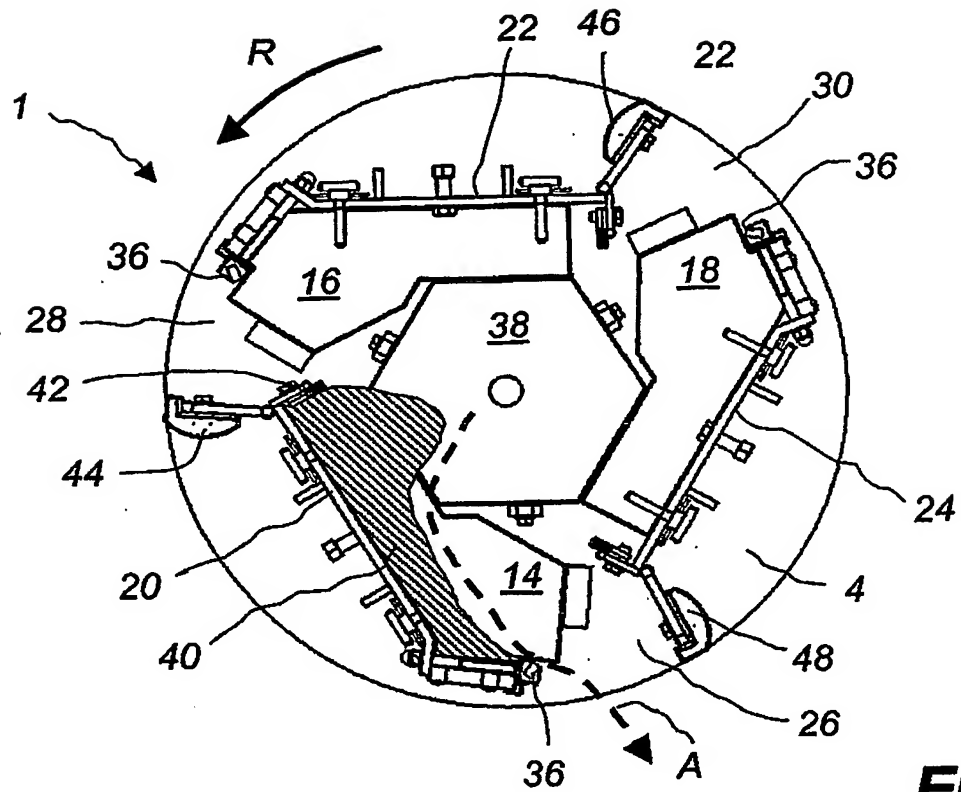


Fig. 3

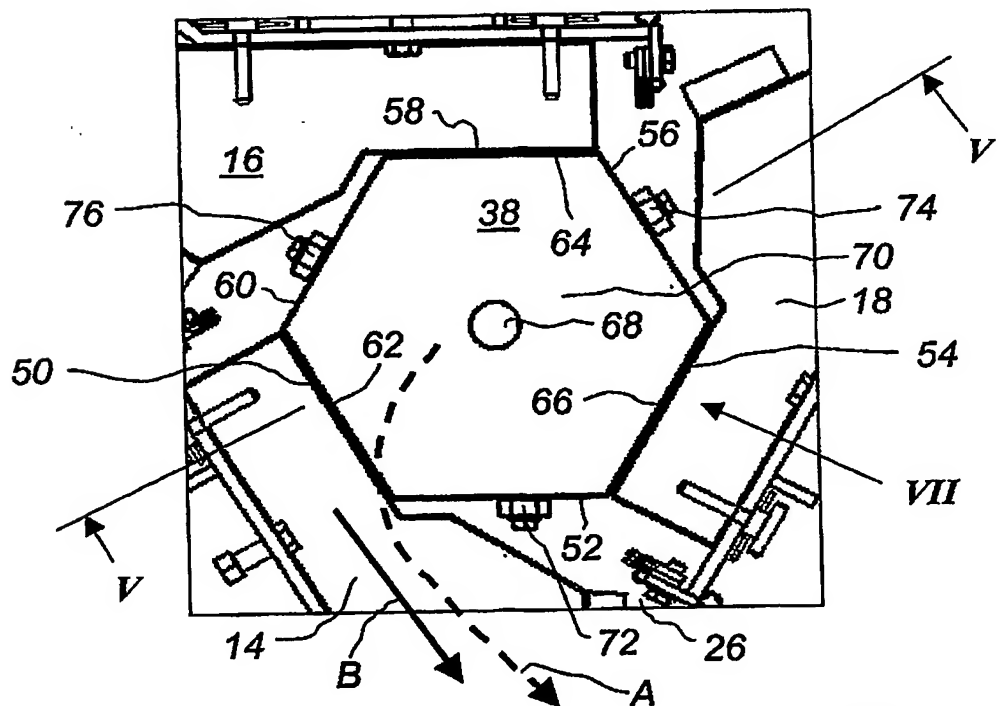


Fig. 4

3/6

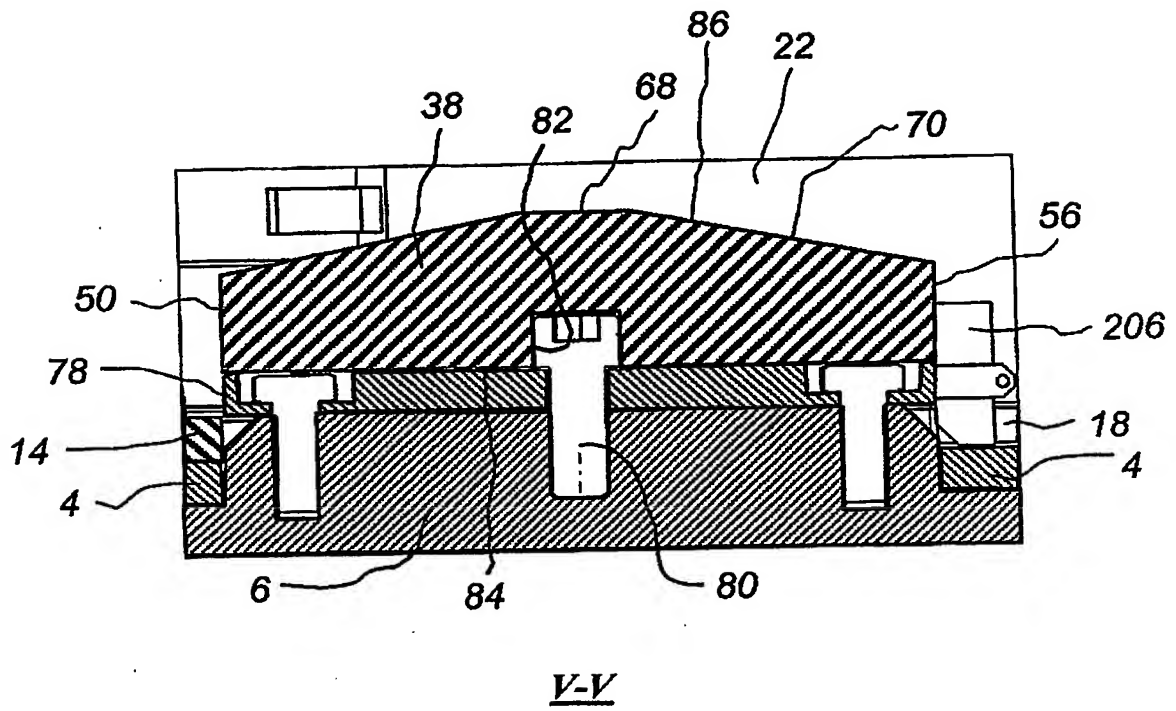


Fig. 5

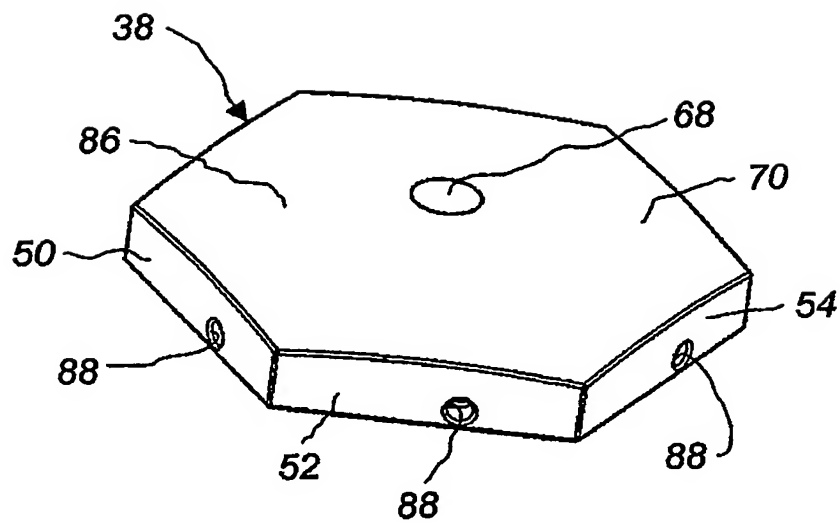


Fig. 6

4/6

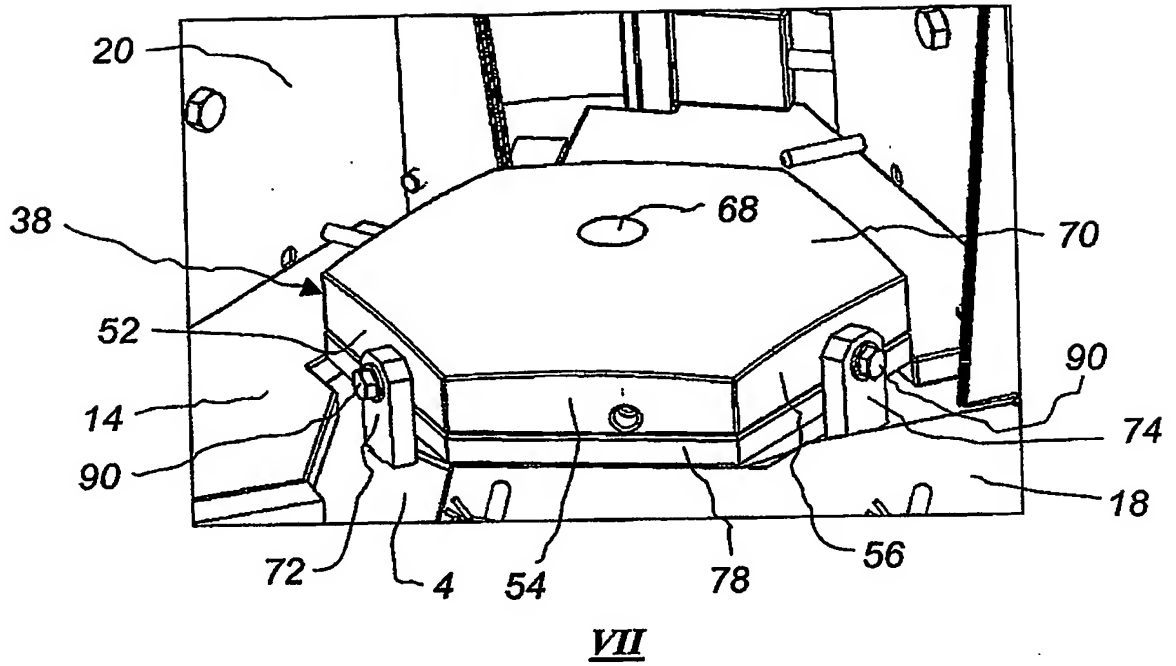


Fig. 7

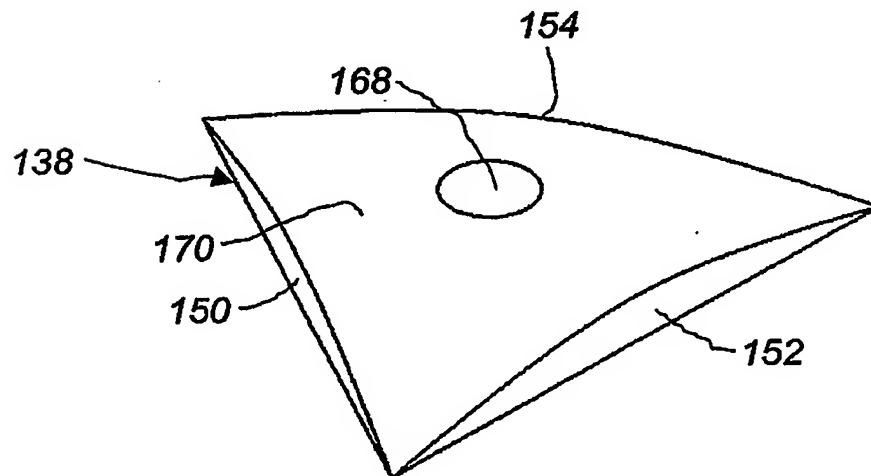


Fig. 8

5/6

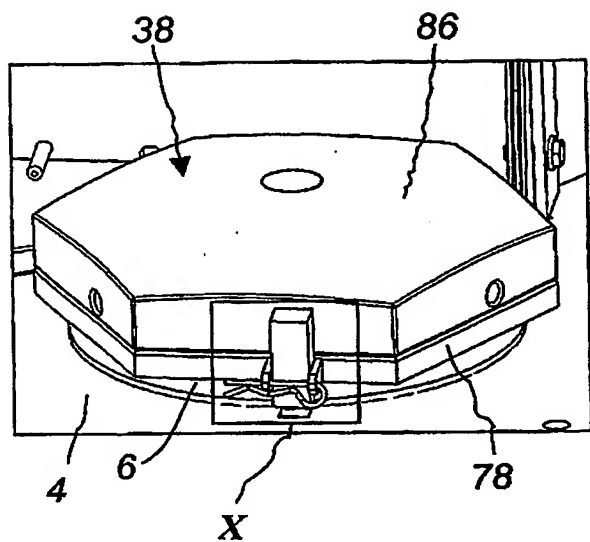


Fig. 9

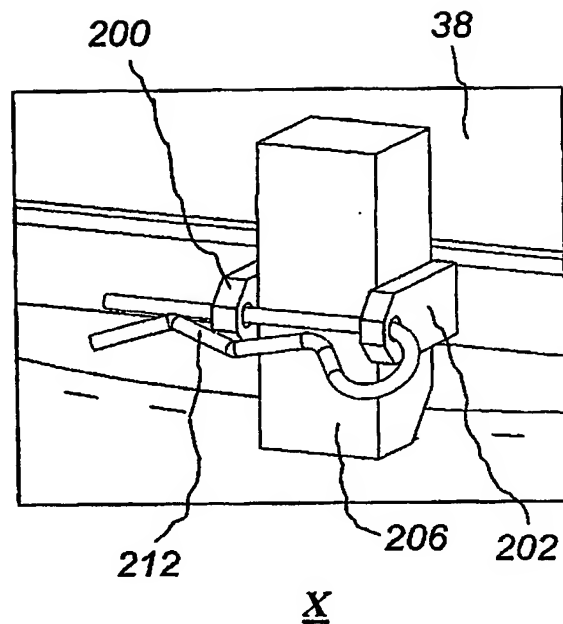


Fig. 10

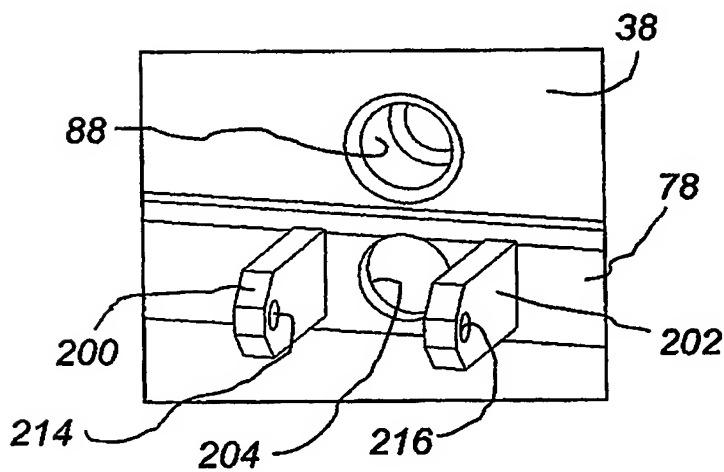


Fig. 11

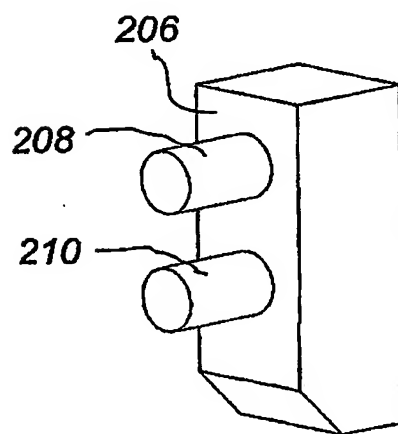


Fig. 12

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.